# Gaussian Beams

N. Fressengeas

Laboratoire Matériaux Optiques, Photonique et Systèmes Unité de Recherche commune à l'Université de Lorraine et à Supélec

Download this document from http://arche.univ-lorraine.fr



# Further reading [KL66, GB94]

A. Gerrard and J.M. Burch.

Introduction to matrix methods in optics.

Dover, 1994.

H. KOGELNIK and T. LI.
Laser beams and resonators.

Appl. Opt., 5(10):1550–1567, Oct 1966.



#### Course Outline

- 1 Fundamentals of Gaussian beam propagation
  - Gaussian beams vs. plane waves
  - The fundamental mode
  - Higher order modes
- Matrix methods for geometrical and Gaussian optics
  - Linear algebra for geometrical optics
  - A few simple matrices
  - Matrix method for Gaussian beams



## Plane waves do not exist

Waves carrying an infinite amount of energy cannot come into existence

#### Planes waves

- Plane wave have a homogeneous transversal electric field
- Ponting's vector norm, and power density, are also homogeneous
- Total carried power is infinite

#### Practical use of plane wave theory: usual unsaid approximation

- Plane waves of finite extent are often used
- Strictly speaking, they are not plane waves
- To what extent can we assume they are plane waves?



Gaussian beams vs. plane waves The fundamental mode Higher order modes

# Plane waves, Gaussian beams...what else?

Solutions of the wave equations: one finds only those he was searching for

# Solving the wave equation

$$\overrightarrow{\triangle E} = \frac{1}{c^2} \frac{\partial^2 \overrightarrow{E}}{\partial t^2}$$

- Vectorial Partial Derivatives Equations
- Solutions are numerous
- An ansatz<sup>1</sup> is needed to seek solutions

#### Gaussian beams as an ansatz

- We will find another family of solutions
- We never pretend to get them all



<sup>&</sup>lt;sup>1</sup>An ansatz is an *a priori* hypothesis on the form of the sought solution.

#### Gaussian ansatz

Plugging the ansatz into the wave equation builds the envelope equation

### Introducing a space dependent envelope

- Plane wave:  $\overrightarrow{E_0} \times e^{-i\overrightarrow{k}\cdot\overrightarrow{r}}$
- Gaussian ansatz :  $u(x, y, z) \overrightarrow{e_x} \times e^{-ikz}$ 
  - u(x, y, z): complex beam envelope
  - $\overrightarrow{e_x}$  unit vector
- The envelope u(x, y, z) is our new unknown


#### Envelope equation

- Scalar harmonic wave equation:  $\triangle E + k^2 E = 0$
- Envelope equation:  $\triangle u 2ik\frac{\partial u}{\partial z} = 0$



# The paraxial approximation

Also known as Gauss conditions, Slow Varying Envelope...







# Paraxial approximation and partial derivatives

Assuming small angles is equivalent to neglecting z derivatives

Transversal variation vs. longitudinal variation





Transversal Laplacian

$$\frac{\partial^2}{\partial z^2} \ll \frac{\partial^2}{\partial x^2}$$

 $\triangle \approx \triangle_{\perp}$ 

# A first solution to the paraxial wave equation

The simplest one, though probably the more important

#### Wave Propagation Equation

$$\triangle_{\perp} u - 2ik \frac{\partial u}{\partial z} = 0$$

#### Complex beam radius

q(z)

- Real part: phase variations
- Imaginary part: intensity variations
- Plugging ansatz: q' = 1
- Integration: q(z) = q(0) + z

# A simple ansatz

$$u = e^{-i\left(P(z) + \frac{k}{2q(z)}r^2\right)}$$

#### Phase shift

P(z)

- Phase shift with respect to the plane wave
- qP' + i = 0



# The complex beam radius

q(z)

A closer look to the signification on a complex parameter


$$u=e^{-i\left(P(z)+\frac{k}{2q(z)}r^2\right)}$$

A complex parameter is linked to two real ones

$$\frac{1}{q} = \frac{1}{R} - i \frac{\lambda}{\pi W^2}$$

The ansatz re-written

$$u = e^{-i\left(P(z) + k\frac{r^2}{2R(z)}\right)} e^{-\frac{r^2}{W(z)^2}}$$






# Spherical wavefront of radius R at abscissa z

#### Phase at abscissa z

- Constant phase on sphere
- Phase  $\propto d$ ,  $r \ll R$
- $d = R \sqrt{R^2 r^2}$
- $d \approx \frac{r^2}{2R}$

#### Gaussian ansatz

$$u = e^{-i\left(P(z) + k\frac{r^2}{2R(z)}\right)}e^{-\frac{r^2}{W(z)^2}}$$





# Gaussian Beam Complex Amplitude

Where the Gaussian beam amplitude is derived from the ansatz and  $q^\prime=1$ 

### A quick summary

- Ansatz :  $u = e^{-i\left(P(z) + \frac{k}{2q(z)}r^2\right)}$
- Complex beam radius :  $\frac{1}{q} = \frac{1}{R} i \frac{\lambda}{\pi W^2}$
- Beam radius equation : q' = 1 q(z) = q(0) + z

### Assuming a plane wavefront for z = 0

$$q(0) = i \frac{\pi W_0^2}{\lambda}$$


• 
$$W^2(z) = W_0^2 \left[ 1 + \left( \frac{\lambda z}{\pi W_0^2} \right)^2 \right]$$

• 
$$R(z) = z \left[ 1 + \left( \frac{\pi W_0^2}{\lambda z} \right)^2 \right]$$



# Gaussian Beam Intensity

$$W^2(z) = W_0^2 \left[ 1 + \left( \frac{\lambda z}{\pi W_0^2} \right)^2 \right]$$



# Asymptotes

• 
$$\frac{\lambda z}{\pi W_0^2} \gg 1$$
  $\Rightarrow$   $W(z) \approx \frac{\lambda z}{\pi W_0}$ 

• 
$$\gamma = \frac{\lambda}{\pi W_0}$$

W<sub>0</sub>: Beam Waist




# Gaussian wavefront curvature

$$R(z) = z \left[ 1 + \left( \frac{\pi W_0^2}{\lambda z} \right)^2 \right]$$

#### Plane and spherical limits

- For small  $z: R = \infty$  plane wavefront
- For high  $z : R \approx z$  spherical wavefront

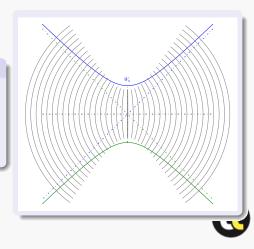

# The Rayleigh length

A quantitative criterion to decide whether a Gaussian beam is plane or spherical

# Plane for small z

$$\frac{\lambda z}{\pi W_0^2} \ll 1$$

- $W(z) \approx W_0$
- $\bullet \lim_{z\to 0} R(z) = \infty$


# Spherical for high z

$$\frac{\lambda z}{\pi W_0^2} \gg 1$$

- $W(z) \approx \frac{\lambda z}{\pi W_0}$
- $R(z) \approx z$

# The Rayleigh length is the limit

$$L_R = \frac{\pi W_0^2}{\lambda}$$



# The homogeneous phase shift

# $u = e^{-i\left(P(z) + \frac{k}{2q(z)}r^2\right)}$

### Recall the equation

$$qP' + i = 0$$

$$\Leftrightarrow$$

$$P'(z) = -\frac{\imath}{z + iL_R}$$

#### Integrate it

$$P(z) = i \ln \left( \frac{W_0}{W(z)} \right) - \tan^{-1} \left( \frac{z}{L_R} \right)$$

### Complex phase meaning

- Real part : Phase shift with respect to plane wave
- Imaginary part:  $\frac{W_0}{W(z)}$  factor to ensure energy conservation



# The fundamental Gaussian mode

#### General expression

$$E(r,z) = \frac{W_0}{W(z)} e^{-i[kz+P(z)]-r^2\left(\frac{1}{W(z)^2} + i\frac{k}{2R(z)}\right)}$$

With, in (nearly) the order of appearance on the screen

• 
$$W^2(z) = W_0^2 \left[ 1 + \left( \frac{z}{L_R} \right)^2 \right]$$

• 
$$R(z) = z \left[ 1 + \left( \frac{L_R}{z} \right)^2 \right]$$

• 
$$P(z) = -\tan^{-1}\left(\frac{z}{L_R}\right)$$

• Rayleigh length 
$$L_R = \frac{\pi W_0^2}{\lambda}$$

• Diffraction half angle: 
$$\gamma \approx \frac{\lambda}{\pi W_0} = \frac{W_0}{L_R}$$



# High order Hermite-Gaussian modes

A Cartesian family of higher order modes

#### Ansatz

$$u(x,y,z) = g\left(\frac{x}{W(z)}\right)h\left(\frac{y}{W(z)}\right)e^{-i\left(P(z) + \frac{k}{2q(z)}\left(x^2 + y^2\right)\right)}$$

#### Plugged into the wave equation

- q' = 1
- $\exists m \in \mathbb{N}, \ \frac{\partial g}{\partial x^2} 2x \frac{\partial g}{x} + 2mg = 0$
- $\exists n \in \mathbb{N}, \ \frac{\partial h}{\partial y^2} 2y \frac{\partial h}{y} + 2nh = 0$
- qP' + (1 + m + n)j = 0



# Behavior of Hermite-Gaussian modes

Each mode is a mere space modulation of the fundamental

$$q'=1$$

- ullet Same equation for q as in the fundamental mode
- W(z) and R(z) retain their meanings and properties
- Rayleigh length and diffraction angle are unchanged


$$\frac{\partial^2 g}{\partial x^2} - 2x \frac{\partial g}{x} + 2mg = 0 \qquad \qquad \frac{\partial h}{\partial y^2} - 2y \frac{\partial h}{y} + 2nh = 0$$

- Solutions are, by definition, the orthogonal Hermite polynomials
- $\mathcal{H}_0 = 1$ ,  $\mathcal{H}_1 = x$ ,  $\mathcal{H}_2 = 4x^2 1$ ,  $\mathcal{H}_3 = 8x^3 12x \dots$
- $\mathcal{H}_n$  has degree n
- $\bullet \ g\left(\frac{x}{W(z)}\right) h\left(\frac{y}{W(z)}\right) = \mathcal{H}_m\left(\sqrt{2}\frac{x}{W(z)}\right) \mathcal{H}_n\left(\sqrt{2}\frac{y}{W(z)}\right)$



# Intensity profiles of Hermite Gaussian (HG) modes

The intensity if proportional to the squared envelope

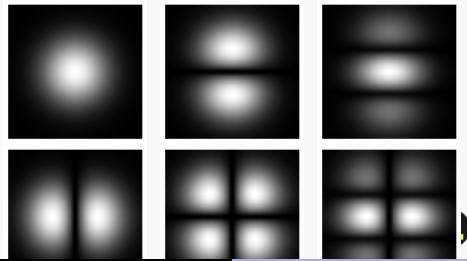

# High order Laguerre-Gaussian modes

A cylindrical family of higher order modes

#### **Ansatz**

$$u(r, \phi, z) = g\left(\frac{r}{W(z)}\right) e^{-i\left(P(z) + \frac{k}{2q(z)}r^2 + l\phi\right)}$$

#### Plugged into the wave equation

• 
$$q' = 1$$

• 
$$\exists (l, p) \in \mathbb{N}^2$$
,  $r \frac{\partial^2 g}{\partial r^2} - (l+1-x) \frac{\partial g}{x} + pg = 0$ 

• 
$$qP' + (1 + 2p + I)j = 0$$



# Behavior of Laguerre-Gaussian modes

Each mode is a mere space modulation of the fundamental

$$q'=1$$

# same as HG modes

- ullet Same equation for q as in the fundamental mode
- W(z) and R(z) retain their meanings and properties
- Rayleigh length and diffraction angle are unchanged


$$r\frac{\partial^2 g}{\partial r^2} - (I + 1 - x)\frac{\partial g}{x} + pg = 0$$

- Solutions are, by definition, the orthogonal generalized Laguerre polynomials
- $\mathcal{L}_0^{(I)} = 1$ ,  $\mathcal{L}_1^{(I)} = -x + I + 1$ ,  $\mathcal{L}_2^{(I)} = \frac{x^2}{2} (I + 2)x + \frac{(I+1)(I+2)}{2}$
- $\mathcal{L}_{m}^{(I)}$  has degree m
- $g\left(\frac{r}{W(z)}\right) = \left(\sqrt{2}\frac{r}{W(z)}\right)^{l} \mathcal{L}_{p}^{(l)}\left(2\frac{r^{2}}{W^{2}(z)}\right)$



# Intensity profiles of Laguerre Gaussian (LG) modes


The intensity if proportional to the squared envelope

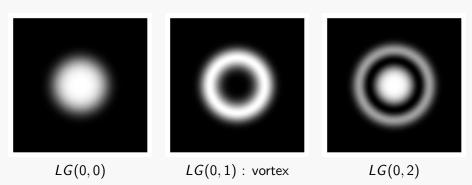



# Intensity profiles of other Laguerre Gaussian (LG) modes

The intensity if proportional to the squared envelope

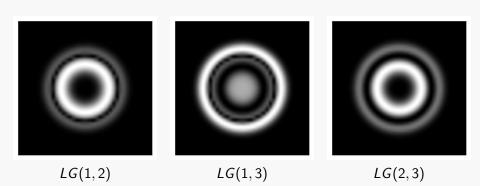



# Homogeneous phase shift is different for high order modes aP' + (1 + m + n)i = 0 aP' + (1 + 2p + l)i = 0

#### A small phase difference between modes around the beam waist

- Slightly different optical paths for different orders
- Slightly different oscillating frequencies in lasers
- Usually forgotten



# Geometrical optics framework

Where is is shown that rays are not so thin as you may think

### Geometrical optics do not deal with thin rays

- $\gamma = \frac{\lambda}{\pi M_0}$ A thin ray has a thin waist: it should diffract
- Thin rays are seldom alone: their meaning is collective
- A ray is a Poynting vector curve
- A bunch of rays describes a wavefront

# Do geometrical optics deal with plane and spherical waves?

- Parallel rays imply a plane wavefront
- Converging or diverging rays imply a spherical wavefront
- But neither of them has an infinite extension!



# Geometrical optic is Gaussian optics

#### Transversely limited plane waves

Parallel rays

Gaussian Beams within their Rayleigh zone

#### Transversely limited spherical waves

Con(Di)verging rays

Gaussian Beams far from their Rayleigh zone

#### Orders of magnitude

- He-Ne laser:  $W_0 \approx 1 \text{mm}, \lambda = 633 \text{nm}, L_R \approx 5 \text{m}$
- GSM Antenna:  $W_0 \approx 1 \text{m}, \lambda \approx 33 \text{cm}, L_R \approx 10 \text{m}$



# Geometrical optics is linear

Geometrical optics stems entirely from Descartes law

$$n_1 \sin(\theta_1) = n_2 \sin(\theta_2)$$

### Descartes made paraxial

Paraxial approximation :  $\theta \ll 1$ 

 $n_1\theta_1 \approx n_2\theta_2$ 

#### Geometrical optics is linear algebra

- Paraxial Descartes is linear
- Straight line propagation is linear
- The behavior of a ray through any optical system can be described linearly



# Matrix geometrical optics

A 2 dimensional linear algebra framework

## The ray vector


$$v = \begin{pmatrix} y \\ \theta \end{pmatrix}$$

- y : distance from the axis
- $\bullet$   $\theta$  : angle to the axis

#### An optical system


$$v' = Mv$$

- M is a  $2 \times 2$  real matrix
- It can describe any centered paraxial optical system



# Optical system composition

Optical system composition reduced to matrix product

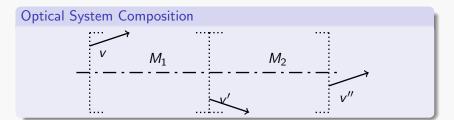

#### Matrix Composition

$$\bullet \ v' = M_1 \cdot v$$

• 
$$v'' = M_2 \cdot v'$$

• 
$$v'' = M_2 M_1 \cdot v$$

### Complex systems

Compose simple systems



# Propagation in a homogeneous medium


$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = M_d \begin{pmatrix} y \\ \theta \end{pmatrix}$$

### Light propagates in straight line

- No direction change:  $\theta' = \theta$
- $y' = y + d \sin(\theta)$

 $M_d$ 

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & d \\ 0 & 1 \end{bmatrix} \begin{pmatrix} y \\ \theta \end{pmatrix}$$





# Passing through a plane interface


$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = M_p \begin{pmatrix} y \\ \theta \end{pmatrix}$$

#### Descartes

- No propagation: y' = y
- $n \sin(\theta) = n' \sin(\theta')$
- $\theta' \approx \frac{n}{n'}\theta$

 $M_p$ 

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & 0 \\ 0 & \frac{n}{n'} \end{bmatrix} \begin{pmatrix} y \\ \theta \end{pmatrix}$$





# Passing through a thin lens


$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = M_I \begin{pmatrix} y \\ \theta \end{pmatrix}$$

#### Two characteristic rays

- No propagation: y' = y
- Blue ray:  $y = 0 \Rightarrow \theta' = \theta$
- Red ray:  $\theta = 0 \Rightarrow \theta' = -\frac{1}{f}y$

 $M_I$ 

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{bmatrix} \begin{pmatrix} y \\ \theta \end{pmatrix}$$





# Passing through a (thin) spherical interface

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = M_s \begin{pmatrix} y \\ \theta \end{pmatrix}$$

#### Descartes


Thin interface

No propagation: y' = y

- Blue ray:  $y \approx R\theta \Rightarrow \theta' = \theta$
- Red ray:  $y = 0 \Rightarrow \theta' \approx \frac{n}{n'}\theta$

 $M_s$ 

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & 0 \\ \frac{n'-n}{n'R} & \frac{n}{n'} \end{bmatrix} \begin{pmatrix} y \\ \theta \end{pmatrix}$$





#### **Mirrors**


Unfolding the light


#### Plane mirrors as if they did not exist

$$\begin{pmatrix} \mathbf{y}' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & \mathbf{0} \\ \mathbf{0} & \mathbf{1} \end{bmatrix} \begin{pmatrix} \mathbf{y} \\ \theta \end{pmatrix}$$

#### Spherical Mirrors are thin lenses

$$\begin{pmatrix} y' \\ \theta' \end{pmatrix} = \begin{bmatrix} 1 & 0 \\ -\frac{2}{B} & 1 \end{bmatrix} \begin{pmatrix} y \\ \theta \end{pmatrix}$$







# Matrix property

A determinant property stemming from all the simple matrices determinants

$$n$$
: start index  $n'$ : stop index  $\forall M$ , det  $(M) = \frac{n}{n'}$ 



# Gaussian modes, propagation and lenses

A Gaussian mode does not change upon propagation of by passing through thin interfaces or lenses

$$g\left(\frac{x}{W(z)}\right)h\left(\frac{y}{W(z)}\right)e^{-i\left(P(z)+\frac{k}{2q(z)}\left(x^2+y^2\right)\right)}$$

- z independent modulation of the fundamental mode
- Free space q'=1 common property
- Thin lens does not change mode profile

# Common R(z) and W(z) behavior

All the modes share the same laws on q(z), R(z) and W(z)



# Gaussian beam propagation: the ABCD law

The transformation of the complex radius q for simple optical systems

#### Free space

$$q' =$$

• 
$$q_1 = q_0 + d$$

• 
$$M_d = \begin{pmatrix} 1 & d \\ 0 & 1 \end{pmatrix}$$

$$n_0/n_1=R_0/R_1$$

• 
$$\frac{q_1}{q_0} = \frac{n_1}{n_0} \Rightarrow q_1 = \frac{1 \times q_0}{\frac{n}{n'}}$$

• 
$$M_p = \begin{pmatrix} 1 & 0 \\ 0 & \frac{n_0}{n_1} \end{pmatrix}$$

# q'=1 Thin lens

$$\frac{1}{R_1} = \frac{1}{R_0} - \frac{1}{f}$$

$$\bullet \ \frac{1}{q_1} = \frac{1}{q_0} - \frac{1}{f} \Rightarrow q_1 = \frac{1}{-\frac{1}{f}q_0 + 1}$$

$$\bullet \ M_I = \begin{pmatrix} 1 & 0 \\ -\frac{1}{f} & 1 \end{pmatrix}$$

# Kogelnik's ABCD law

$$M = \begin{pmatrix} A & B \\ C & D \end{pmatrix} \Rightarrow q_1 = \frac{Aq_0 + B}{Cq_0 + D}$$

# Geometrical and Gaussian optics are linked through paraxial approx.

Gaussian beam propagation can be evaluated, for any mode, using simple matrix geometrical optics



# Focal lens example

Using the ABCD law to verify that parallel rays do converge on the focal plane

#### Parallel input beam


- Input plane : just before lens
- Output plane : after length d
- Input beam at waist:  $q_0 = iL_{R_0}$

#### Propagation matrix

$$M_d \cdot M_f = \begin{pmatrix} -\frac{d}{f} + 1 & d \\ -\frac{1}{f} & 1 \end{pmatrix}$$

#### **ABCD law**

$$q_1 = \frac{df + i(f - d)L_{R_0}}{f - iL_{R_0}}$$



d for plane wavefront: imaginary  $q_1$ 

$$d = \frac{f}{1 + \left(\frac{f}{L_{R_0}}\right)^2}$$